




Slew on the **safe** side

Customer-specific slewing rings by IMO have been impressing the crane industry for more than 25 years with their long service life and reliability.

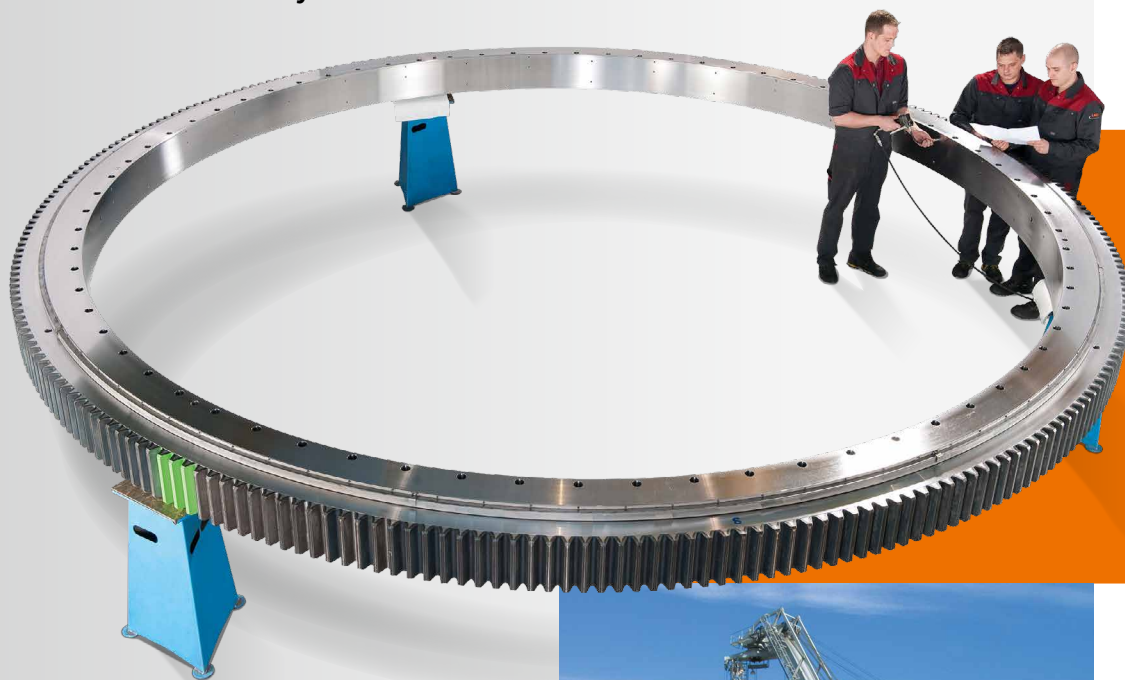

Slewing rings for cranes

IMO slewing rings

- diameters over 6 m
- external gears, internal gears or without gears
- single row and double row ball slewing rings
- 3-row roller slewing rings
- gear rims
- customer-specific versions




Handling crane

Mobile crane

Harbor crane

Construction crane

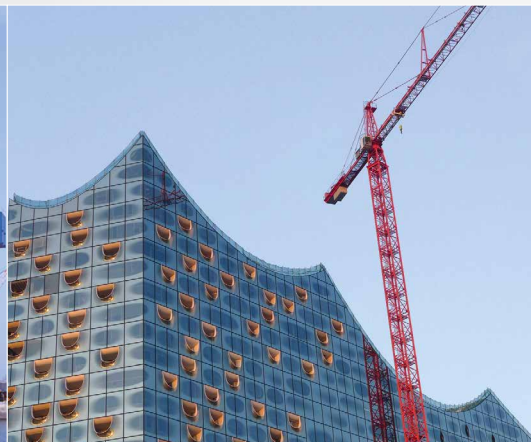

Your Advantages

for purchasing

- focus on cost-efficient solutions
- delivery times you can rely on
- short reaction times

for service


- reduced servicing costs
- long service life
- worldwide service & spare parts

for engineering

- customer-specific versions
- special seals to prevent ingress of dirt and coarse particles
- FE analysis of adjacent structure

for end customers

- customized sturdy solutions
- high levels of operational safety
- highest level of resilience
- low overall costs

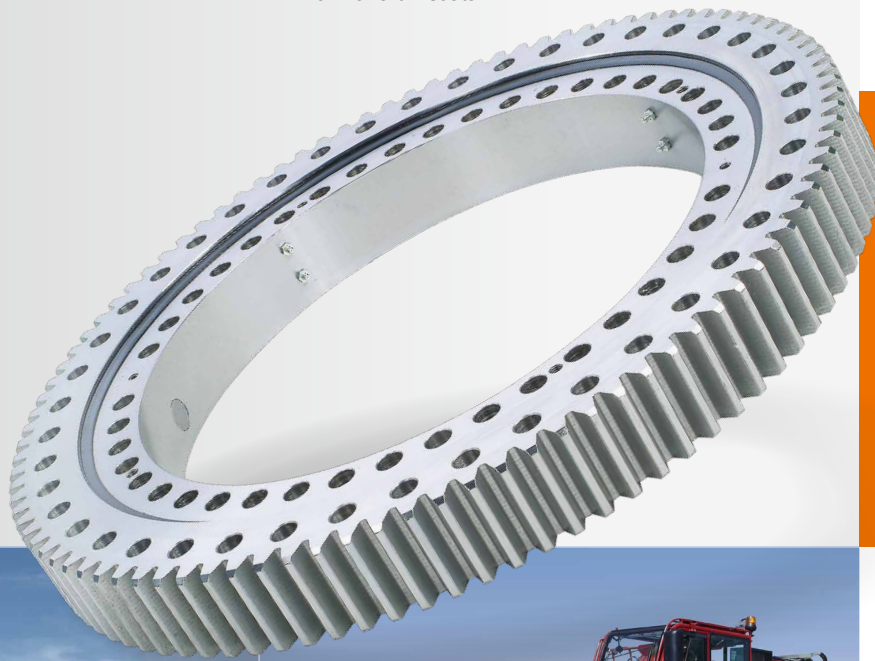

IMO

made in Gremsdorf,
Germany

More than 25 years on your side.



A double row ball slewing ring is used in this loading crane



The superstructure is rotated using a single row slewing ring with external gear

Certifications

- ISO 9001
- ISO 14001
- OHSAS

Headquarters

IMO GmbH & Co. KG
Imostr. 1
91350 Gremsdorf
Germany

Tel. +49 9193 6395 - 4434
Fax +49 9193 6395 - 4140
cranes@imo.de

Your contact in the US

IMO USA Corp.
Tel. +1 843 695-6200
americas@imo.us



A ball slewing ring with external gear rotates this crane trolley on an aluminum smelter crane

